

## DriStud RU24 Roof Underlay

Non-Fire retardant, Self-Support, Synthetic Roof Underlay

DriStud RU24 is a **Non-Fire Retardant**, Self-Supporting Synthetic Roof Underlay intended to be used as an alternative to conventional kraft based roof underlays. Once installed it creates a secondary protective weather resistant layer for roof framing (truss or rafter) and provides an air-impermeable layer behind the roof cladding; these layers are essential elements required in the moisture management system for Roofs. It can be installed to all roof framing (Timber or Steel). DriStud RU24 can be used to line roofs, walls, and ceilings.

### WIND ZONES:

Suitable in Wind Zones up to and including "Extra High" as defined in Section: 5, NZS 3604: 2011.

### OVERLAPS / SUPPORT

Printed imagery on all DriStud Roof Underlays must be facing outward with the minimum number of overlaps as possible. When overlapping is unavoidable with both vertical and horizontal applications; a minimum lap of 150mm is required. Upper sheets must be lapped over the lower sheets to ensure water is shed to the outer face of the underlay. DriStud RU24 must not span more than 1.2m between adjacent supports.

DriStud RU24 must NOT be installed where Fire Retardant roof underlay is specified. DriStud RU24 will provide temporary weather protection for up to 7 Days and can be exposed to wet weather during installation. DriStud RU24 must be supported on netting or safety mesh if used:

- On Roof Pitches less than 10° with vertical installation
- If the support spacing is greater than 1200mm.

### FIXINGS

DriStud RU24 must be fixed at maximum 300mm centres to all framing members with either 6-8mm staples or 20mm long large head clouts, or proprietary underlay fixings. If metal roof cladding is directly fixed straight onto the underlay, its fixings can replace the underlay fixing requirements.

### ROOF PITCHES

>10°:

If installing on a roof with a pitch greater than 10° then DriStud roof underlays may be installed either horizontally or vertically.

≤10°:

If the roofs pitch is less than 10° self-support roof underlays can be installed horizontally and vertically. Horizontal installation is recommended over vertical installation where possible.

For vertical installation under 10° pitch roof, DriStud RU24 must be installed over a supporting netting or equivalent system on a minimum side lap of 150 mm. The netting and underlays must be installed flat and taut to ensure condensation will drain to the gutter. If any doubts vertical laps are recommended to be sealed with 75mm wide DriStud Cool window flashing tape or DriStud Joining tape to ensure it.

As an alternative solution, DriStud RU24 may run horizontally with the higher layers sitting on top of the lower layers down to roof pitches of minimum 3° without supporting netting. The underlay must be installed flat and taut to ensure condensation will drain to the gutter. At the eaves, the roof underlay should be laid over the top of the fascia and project 20-30 mm into the gutter.

### SAFETY

- The installer shall take all precautions to reduce work hazards.
- The installer of DriStud roof underlays is required to comply fully with Health and Safety in Employment Act 2002.
- Appropriate clothing, safety footwear and hand and face protection must be used in all cases.
- Safety scaffold and barriers must comply with the requirements of the Health and Safety in Employment Act 2002

### WARRANTY

TCL Hunt Ltd warrants that all DriStud roof underlays will be free from manufacturing defects. Upon receiving DriStud roof underlays, it is recommended that a visual check is made. Where defects are observed, these will be replaced at the discretion of TCL Hunt, provided they are returned to point of purchase. If installed in accordance with TCL Hunt installation requirements, TCL Hunt warrants that DriStud roof underlays will comply with all relevant provisions of the NZ Building Code. DriStud RU 24 roof underlay will have a serviceability life equal to that of the roof cladding provided that:

- The balance of the external wall is installed in accordance with the NZ Building Code, and,

# INSTALLATION GUIDE

- All necessary maintenance is undertaken in respect of the external wall system

Please refer to DriSpace website [www.drisspace.co.nz](http://www.drisspace.co.nz) for more information on warranty and disclaimer.

## LONG RUN PROFILED METAL ROOF CLADDING

DriStud RU24 must be installed over the purlins by fixing to the purlins on both edges by the roof fastenings. For horizontal laying, underlay must fit tightly and be lap-taped around all penetrations to provide drainage for condensation, and be free of tears, rips, and punctures. The purlin spacing must be 150mm less than the width of the underlay. If it exceeds this spacing it must be laid vertically.

*COLD ROOF Design Recommendations: installed under long run metal roofing*

- Have a minimum air gap of 25mm between the underlay and any insulation.
- Use sufficient ventilation for air flow to minimize interstitial condensation.
- Use air gap between the metal cladding and synthetic underlays where condensation risks are high.

*WARM ROOF Design Recommendations: used in conjunction with PIR insulation*

- DriStud RU24 has been designed to be installed directly on PIR insulation within warm roofing systems. There is no requirement for a 25mm air gap between the underlay and insulation when a correctly designed vapour control layer is used in the correct location within the warm roofing system.
- When a vapour control layer is not being used within a warm roofing system, a ventilation gap is required, since internal moisture may migrate into the roofing system.

## WHO CAN INSTALL

Where DriStud roof underlays are used for new construction or in connection with a building consent the work should be undertaken or supervised by a Licensed Building Practitioner (LBP) where restricted building work applies. Alternatively, the installer shall have the suitable skills when installing DriStud roof underlays.

## MAINTENANCE


DriStud roof underlays do not require any maintenance but when exposed through removal of roof cladding, the underlays must be inspected and any damaged

areas repaired or replaced.

## CONCRETE AND METAL TILE ROOF CLADDING

DriStud RU24 must be installed under the battens but over the rafters/top truss chords. Anti-ponding boards should be installed at the eaves to prevent the underlay sagging with a minimum fall of 5°.

*Installation Under Concrete and Metal Tile Roof*

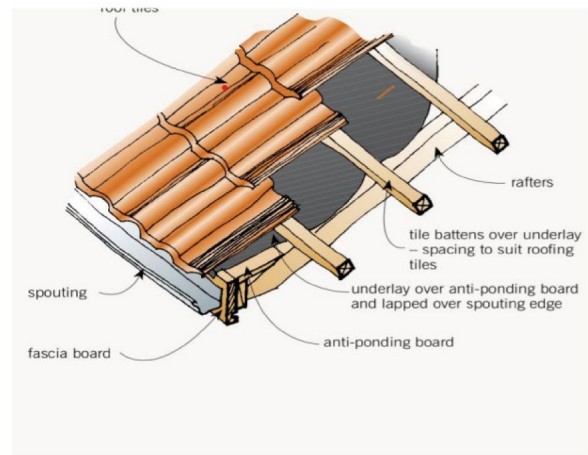

## DESIGN RECOMMENDATIONS

- Have a minimum air gap of 25mm between the underlay and any insulation.
- Use sufficient ventilation to minimize condensation.
- Use air gap between the metal cladding and synthetic underlays where condensation risks are high.

For further information please visit [www.drisspace.co.nz](http://www.drisspace.co.nz) or call **0800 DRISTUD (374 7883)**



Distributed by TCL Hunt  
7 Fisher Crescent, Mt. Wellington, Auckland, New Zealand



A DIVISION OF TCL HUNT

# INSTALLATION GUIDE

Rev 3.0 (March 2019)



Distributed by TCL Hunt  
7 Fisher Crescent, Mt. Wellington, Auckland, New Zealand



A DIVISION OF TCL HUNT